


KELI DEE

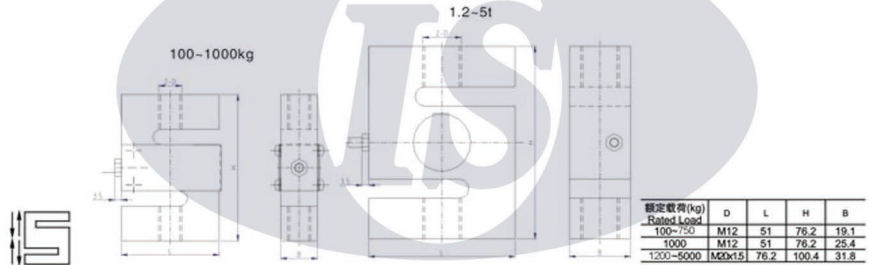

额定载荷(kg) Rated Load	D	L	H	B
100-150	M12	51	76.2	19.1
1000	M12	51	76.2	25.4
1200-5000	M20x1.5	76.2	100.4	31.8

额定载荷 Rated Load	100,150,200,250,300,500,750kg;1.1,2,1.5,2,3,5t	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	2.0±0.003mV/(DEE);3.0±0.003mV/(DEF)	安全过载 Safe load limit	120%F.S
综合误差 Total error	±0.03%F.S	极限过载 Over load limit	150%F.S
蠕变(30分钟) Creep(30min)	±0.02%F.S	推荐激励电压 Recommend excitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Max excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP65(100-1000kg);IP68(1200-5000kg)
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Material	合金钢Alloy Steel, 不锈钢Stainless Steel
输入阻抗 Input resistance	400±20Ω	电缆 Cable	
输出阻抗 Output resistance	352±3Ω		Length:5m
绝缘电阻 Insulation resistance	≥5000MΩ		Diameter:φ5mm