




LFSB-A

Description

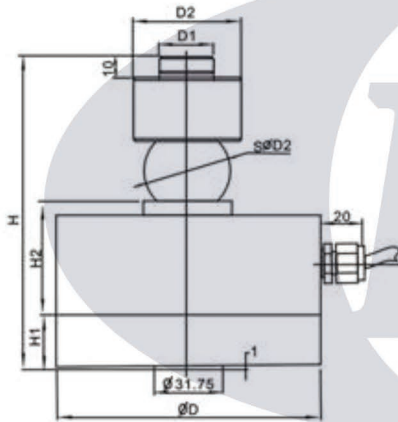

额定载荷 (kib) Rated Load	D	H1	H2	H	D1	D2	D3
5~10	104.6	19.2	45.3	100	21.5	19.5	37
25,50,60	122	25	54	147	25	40	50
100	138	30	57	155	25	40	50

额定载荷 Rated Load	5~10,25,50,60,100kib	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	4.0±0.006mV/V	安全过载 Safe load limit	100%F.S
综合误差 Total error	±0.05%F.S;±0.1%F.S LFSB10KLB	极限过载 Over load limit	120%F.S
蠕变 (30分钟) Creep(30min)	±0.03%F.S	推荐激励电压 Recommend excitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximum excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP67
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Construction	合金钢 Alloy Steel
输入阻抗 Input resistance	400±10Ω	电缆 Cable	
输出阻抗 Output resistance	352±3Ω		Length:12m
绝缘电阻 Insulation resistance	≥5000MΩ		Diameter: φ 6mm