


PST



20~1000kg

1.2~10t

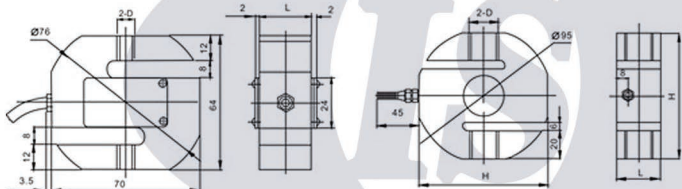

额定载荷 (kg) Rated Load	D	L
20~150	M8	12
200~500	M12	20
700~1000	M12	25

额定载荷 (t) Rated Load	D(mm)	L(mm)	H
1.2~5	M20	32	90
7.5	M24	40	90
10	M30x2	50	110

额定载荷 Rated Load	20,30,50,75,100,150,200,250,300,500,700,1000kg; 1.2,1.5,2.2,2.5,3,5,7.5,10t	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	2.0±0.003mV/V (20kg~7.5t); 1.8±0.002mV/V (10t)	安全过载 Safe load limit	120%F.S
综合误差 Total error	±0.03%F.S	极限过载 Over load limit	200%F.S
蠕变 (30分钟) Creep(30min)	±0.02%F.S	推荐激励电压 Recommendexcitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximum excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP67(20~1000kg);IP68(1.2~7.5t)
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Construction	合金钢Alloy Steel
输入阻抗 Input resistance	400±20Ω(200~300kg,1.2~10t其余不做调整)	电缆 Cable	
输出阻抗 Output resistance	352±3Ω		Length:2.6m(20~1000kg),3m(1.2~10t)
绝缘电阻 Insulation resistance	≥5000MΩ		Diameter: φ5mm(20~1000kg,10t), φ6mm(1.2~7.5t)